

## Features

- N-Channel  
30V/35A,  
 $R_{DS(ON)} = 8m\Omega$  (Typ.) @  $V_{GS} = 10V$   
 $R_{DS(ON)} = 12m\Omega$  (Typ.) @  $V_{GS} = 4.5V$
- P-Channel  
-30V/-32A,  
 $R_{DS(ON)} = 12m\Omega$  (Typ.) @  $V_{GS} = -10V$   
 $R_{DS(ON)} = 18m\Omega$  (Typ.) @  $V_{GS} = -4.5V$
- Very low on-resistance
- Fast Switching


## Applications

- Motor Drive Applications



Halogen-Free

## Pin Description

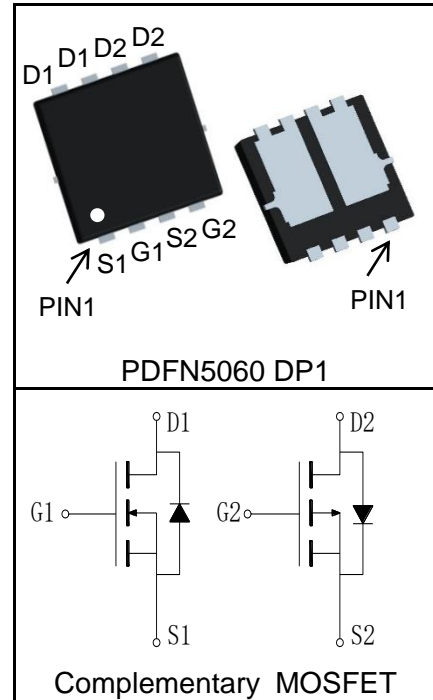

## Absolute Maximum Ratings

Symbol	Parameter		N-Channel	P-Channel	Unit
<b>Common Ratings</b> ( $T_A = 25^\circ\text{C}$ Unless Otherwise Noted)					
$V_{DSS}$	Drain-Source Voltage		30	-30	V
$V_{GSS}$	Gate-Source Voltage		$\pm 20$	$\pm 20$	
$T_J$	Maximum Junction Temperature		150	150	$^\circ\text{C}$
$T_{STG}$	Storage Temperature Range		-55 to 150	-55 to 150	$^\circ\text{C}$
$I_S$	Diode Continuous Forward Current	$T_C = 25^\circ\text{C}$	35	-32	A
<b>Mounted on Large Heat Sink</b>					
$I_{DP}^{(1)}$	300 $\mu\text{s}$ Pulse Drain Current Tested	$T_C = 25^\circ\text{C}$	140	-148	A
$I_D^{(2)}$	Continuous Drain Current @ $T_C$ ( $V_{GS} = \pm 10V$ )	$T_C = 25^\circ\text{C}$	35	-32	A
		$T_C = 100^\circ\text{C}$	22	-20	
	Continuous Drain Current @ $T_A$ ( $V_{GS} = \pm 10V$ ) <sup>(3)</sup>	$T_A = 25^\circ\text{C}$	12	-9	
		$T_A = 70^\circ\text{C}$	10	-7	
$P_D$	Maximum Power Dissipation @ $T_C$	$T_C = 25^\circ\text{C}$	22	33	W
		$T_C = 100^\circ\text{C}$	9	13	
	Maximum Power Dissipation @ $T_A$ <sup>(3)</sup>	$T_A = 25^\circ\text{C}$	3.1	3.1	
		$T_A = 70^\circ\text{C}$	2	2	
$R_{\theta JC}$	Thermal Resistance-Junction to Case		5.8	3.8	$^\circ\text{C}/\text{W}$
$R_{\theta JA}^{(3)}$	Thermal Resistance-Junction to Ambient		40	40	$^\circ\text{C}/\text{W}$
<b>Drain-Source Avalanche Ratings</b>					
$E_{AS}^{(4)}$	Avalanche Energy, Single Pulsed		25	25	mJ

**Electrical Characteristics** ( $T_A=25^\circ\text{C}$  Unless Otherwise Noted)

Symbol	Parameter	Test Condition	KS3622NB			Unit	
			Min.	Typ.	Max.		
<b>Static Characteristics</b>							
$BV_{DSS}$	Drain-Source Breakdown Voltage	$V_{GS}=0V, I_{DS}=250\mu A$	N	30		V	
		$V_{GS}=0V, I_{DS}=-250\mu A$	P	-30			
$I_{DSS}$	Zero Gate Voltage Drain Current	$V_{DS}=30V, V_{GS}=0V$	N		1	$\mu A$	
		$T_J=125^\circ C$			30		
		$V_{DS}=-30V, V_{GS}=0V$	P		-1		
		$T_J=125^\circ C$			-30		
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_{DS}=250\mu A$	N	1.1	1.6	2.3	V
		$V_{DS}=V_{GS}, I_{DS}=-250\mu A$	P	-1.1	-1.6	-2.3	
$I_{GSS}$	Gate Leakage Current	$V_{GS}=\pm 20V, V_{DS}=0V$	N			$\pm 100$	nA
		$V_{GS}=\pm 20V, V_{DS}=0V$	P			$\pm 100$	
$R_{DS(ON)}^{(5)}$	Drain-Source On-state Resistance	$V_{GS}=10V, I_{DS}=15A$	N		8	10	m $\Omega$
		$V_{GS}=-10V, I_{DS}=-15A$	P		12	18	
		$V_{GS}=4.5V, I_{DS}=10A$	N		12	18	
		$V_{GS}=-4.5V, I_{DS}=-10A$	P		18	28	
<b>Diode Characteristics</b>							
$V_{SD}^{(5)}$	Diode Forward Voltage	$I_{SD}=15A, V_{GS}=0V$	N		0.88	1.2	V
		$I_{SD}=-15A, V_{GS}=0V$	P		-0.92	-1.2	
$t_{rr}$	Reverse Recovery Time	N-Channel $I_{SD}=15A, di_{SD}/dt=100A/\mu s$	N		15		ns
			P		21		
$Q_{rr}$	Reverse Recovery Charge	P-Channel $I_{SD}=-15A, di_{SD}/dt=100A/\mu s$	N		28		nC
			P		65		
<b>Dynamic Characteristics<sup>(6)</sup></b>							
$R_G$	Gate Resistance	$V_{GS}=0V, V_{DS}=0V, F=1MHz$	N		1		$\Omega$
			P		2.6		
$C_{iss}$	Input Capacitance	N-Channel $V_{GS}=0V, V_{DS}=15V,$ Frequency=1.0MHz	N		1050		pF
			P		2610		
$C_{oss}$	Output Capacitance	P-Channel $V_{GS}=0V, V_{DS}=-15V,$ Frequency=1.0MHz	N		155		
			P		315		
$C_{rss}$	Reverse Transfer Capacitance	N-Channel Frequency=1.0MHz	N		120		
			P		200		


**Electrical Characteristics** ( $T_A=25^{\circ}\text{C}$  Unless Otherwise Noted)

Symbol	Parameter	Test Condition	KS3622NB			Unit	
			Min.	Typ.	Max.		
<b>Dynamic Characteristics</b> <sup>⑥</sup>							
$t_{d(ON)}$	Turn-on Delay Time	N-Channel $V_{DD}=15\text{V}$ , $I_{DS}=15\text{A}$ , $V_{GEN}=10\text{V}$ , $R_G=3\Omega$  P-Channel $V_{DD}=-15\text{V}$ , $I_{DS}=-15\text{A}$ , $V_{GEN}=-10\text{V}$ , $R_G=3\Omega$	N		11		ns
			P		18		
$t_r$	Turn-on Rise Time		N		23		
			P		27		
$t_{d(OFF)}$	Turn-off Delay Time		N		29		
			P		65		
$t_f$	Turn-off Fall Time		N		8		
			P		29		
<b>Gate Charge Characteristics</b> <sup>⑥</sup>							
$Q_g$	Total Gate Charge	N-Channel $V_{DS}=15\text{V}$ , $V_{GS}=10\text{V}$ , $I_{DS}=15\text{A}$  P-Channel $V_{DS}=-15\text{V}$ , $V_{GS}=-10\text{V}$ , $I_{DS}=-15\text{A}$	N		20		nC
			P		41		
$Q_{gs}$	Gate-Source Charge		N		5		
			P		8		
$Q_{gd}$	Gate-Drain Charge		N		6		
			P		11		

- Notes:
- ① Pulse width limited by safe operating area.
  - ② Calculated continuous current based on maximum allowable junction temperature.
  - ③ When mounted on 1 inch square copper board,  $t \leq 10\text{sec}$ . The value in any given application depends on the user's specific board design.
  - ④ Limited by  $T_{Jmax}$ . Starting  $T_J = 25^{\circ}\text{C}$ , N Channel:  $L = 0.5\text{mH}$ ,  $R_G = 25\Omega$ ,  $I_{AS} = 10\text{A}$ ,  $V_{GS} = 10\text{V}$ , P-Channel:  $L = 0.5\text{mH}$ ,  $R_G = 25\Omega$ ,  $I_{AS} = -10\text{A}$ ,  $V_{GS} = -10\text{V}$ , Part not recommended for use above this value.
  - ⑤ Pulse test; Pulse width  $\leq 300\mu\text{s}$ , duty cycle  $\leq 2\%$ .
  - ⑥ Guaranteed by design, not subject to production testing.






**Ordering and Marking Information**

Device	Package	Packaging	Quantity	Reel Size	Tape width
KS3622NB	PDFN5060 DP1	Tape&Reel	5000	13"	12mm






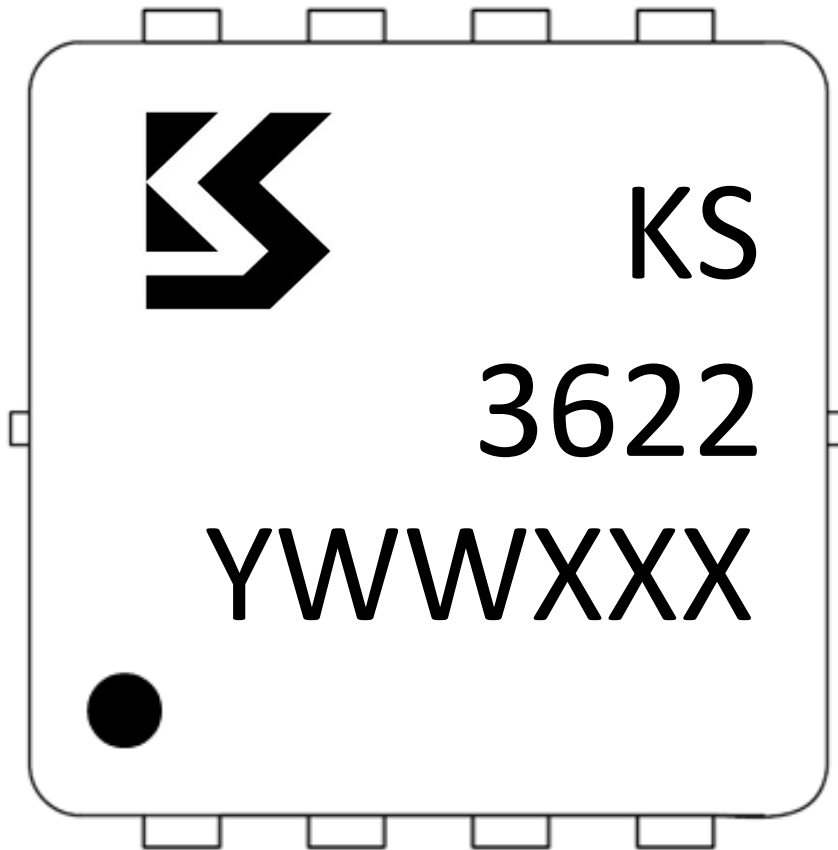


Y =Year,2017-A,2018-B,etc.  
WW =Week.  
XXX =Lot number.






### Typical Characteristics(N-Channel)

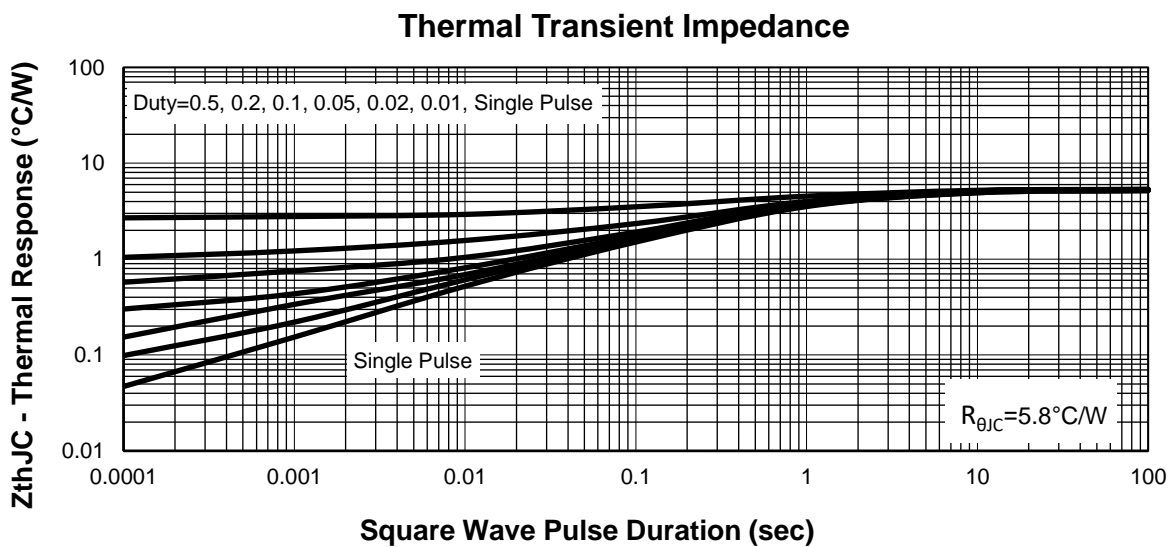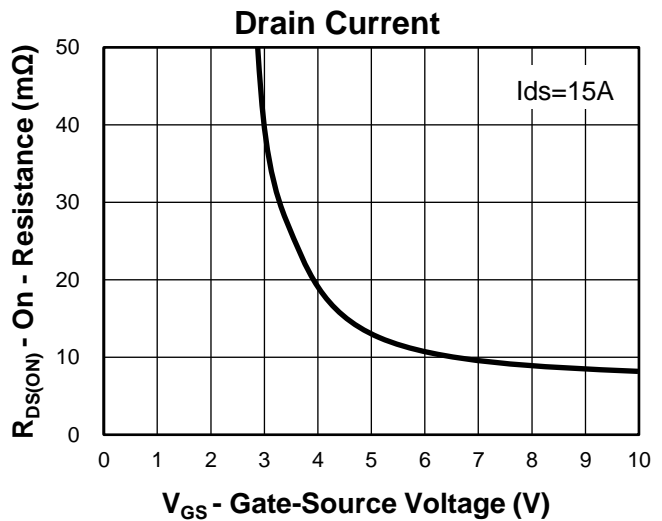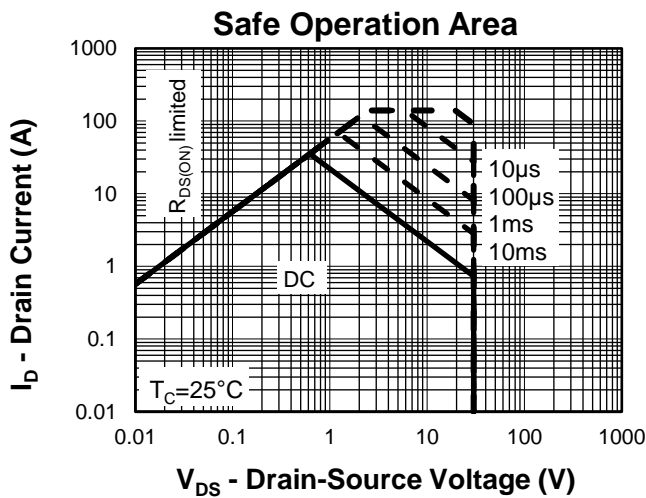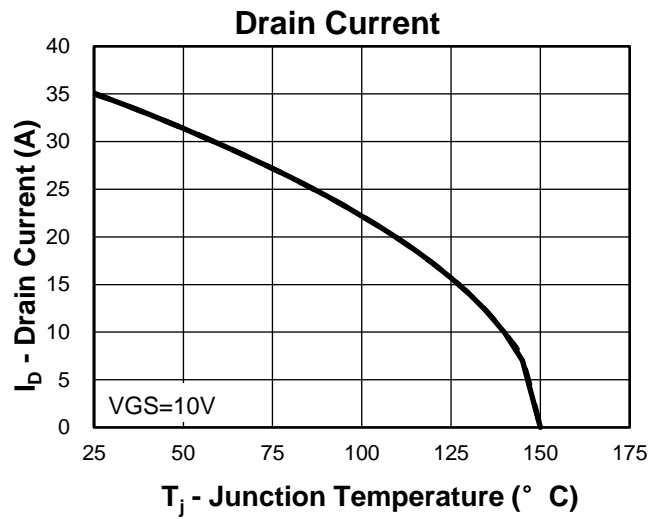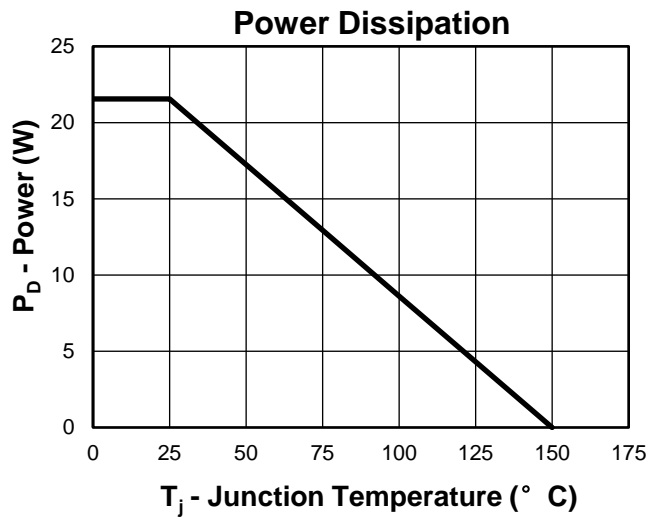







### Typical Characteristics(N-Channel)

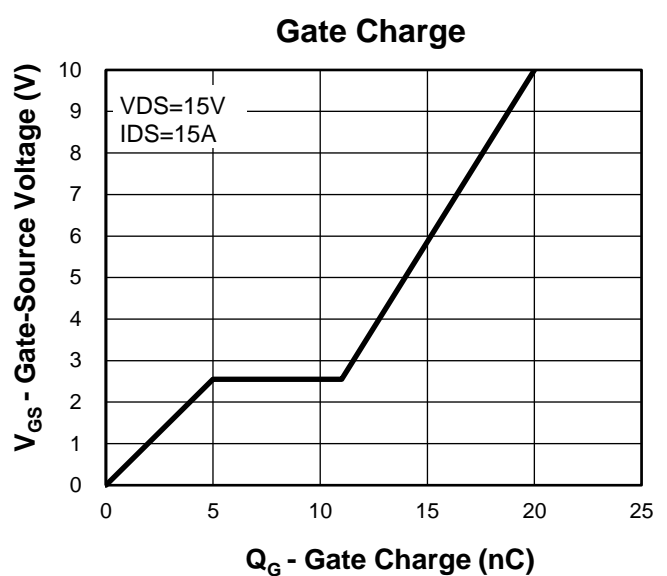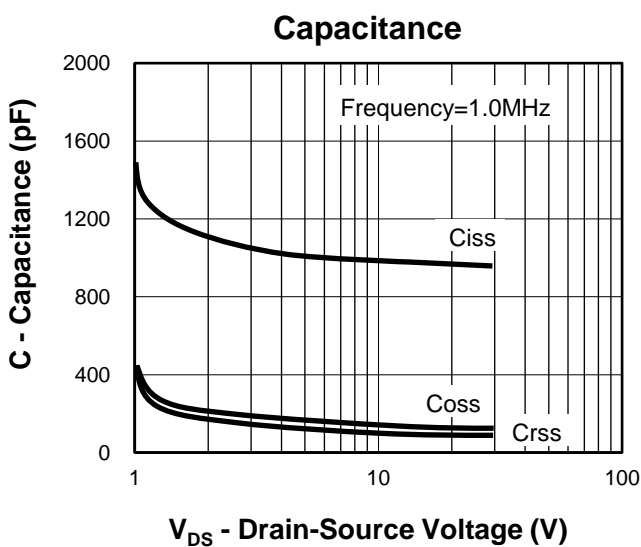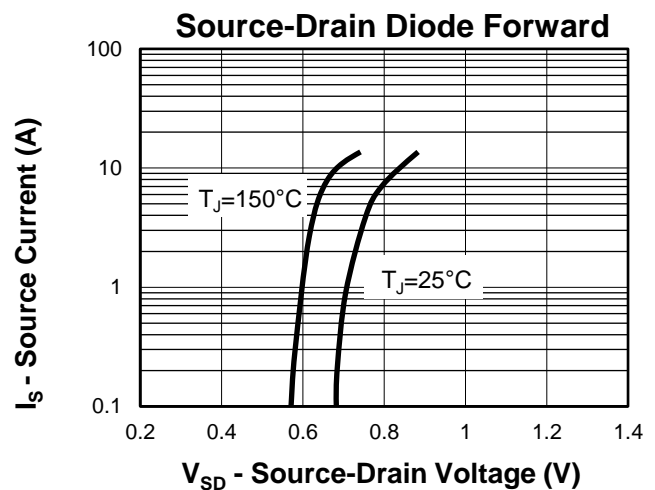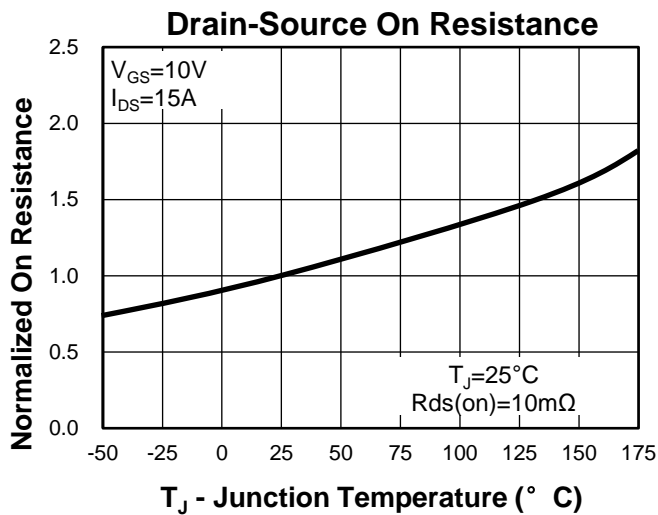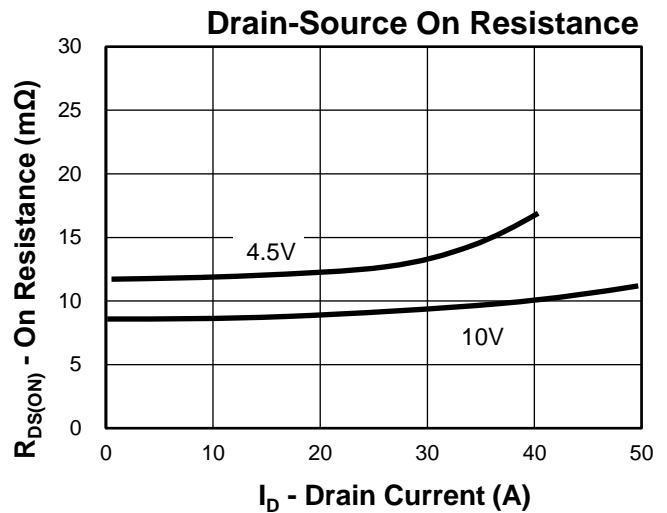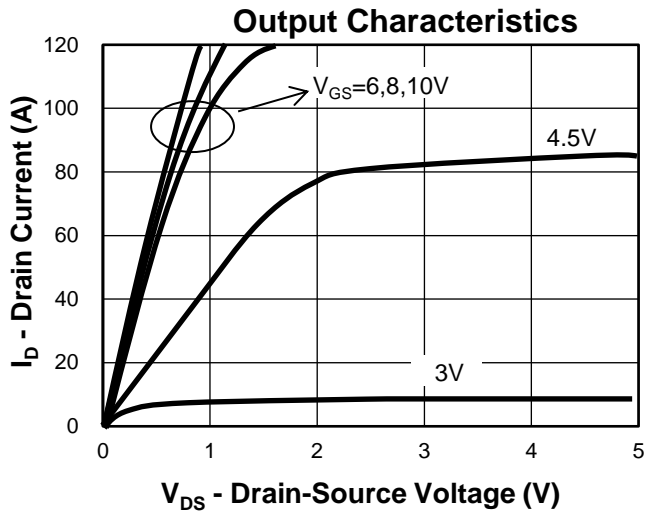


Typical Characteristics(P-Channel)

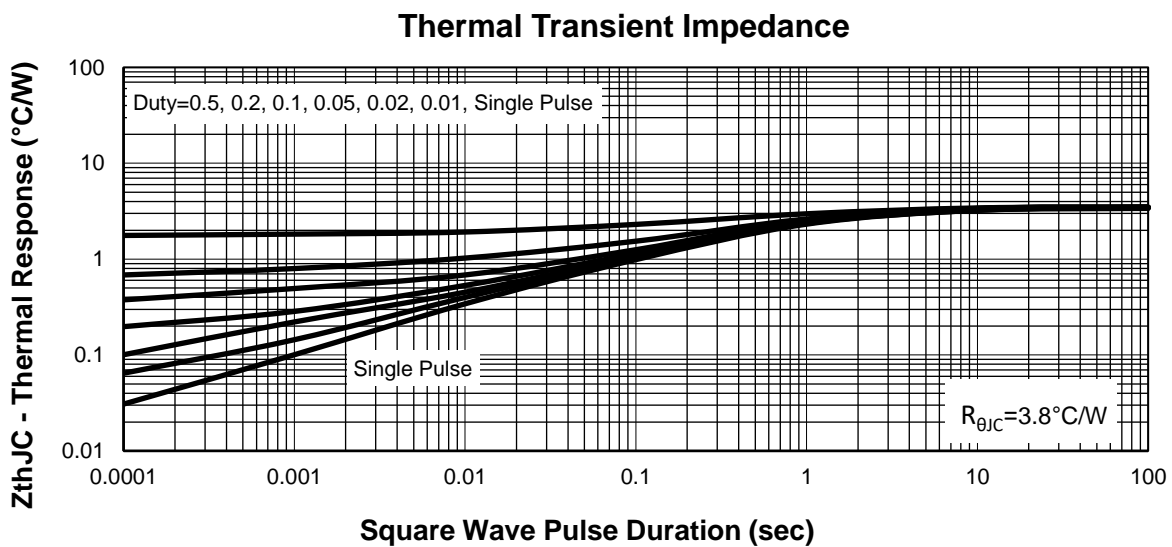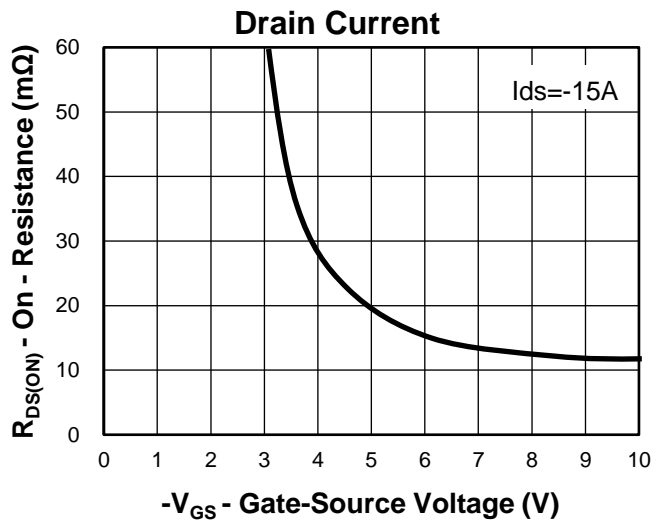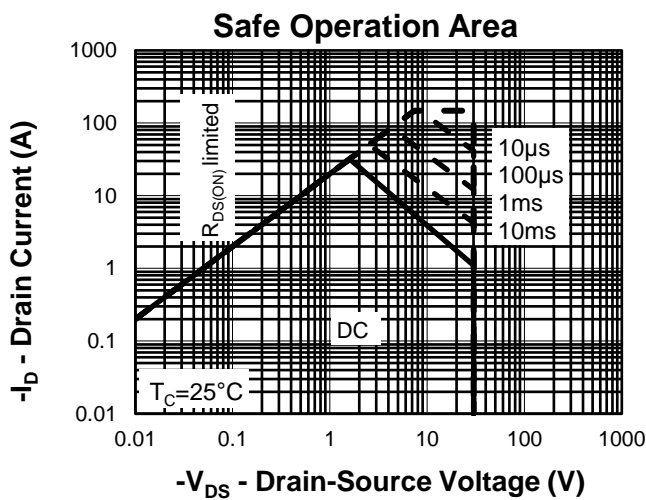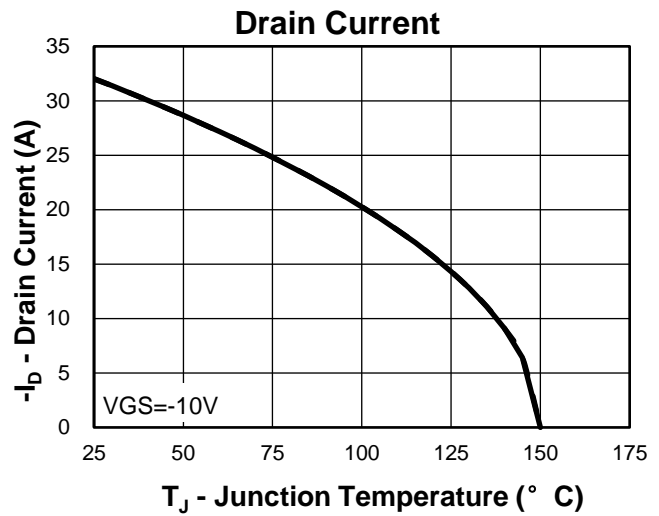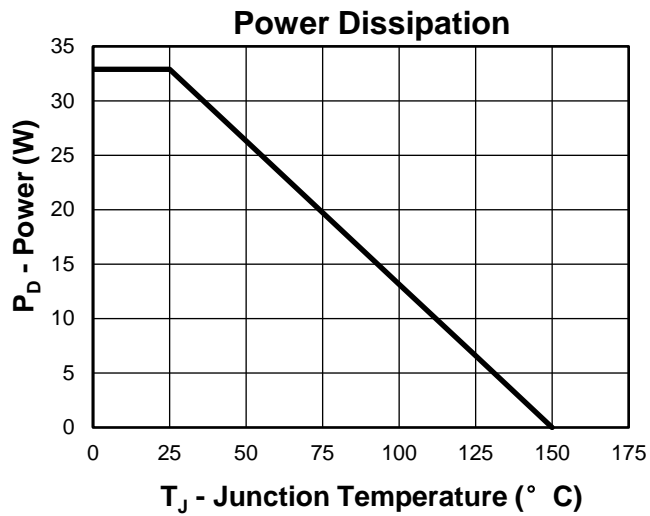

### Typical Characteristics(P-Channel)

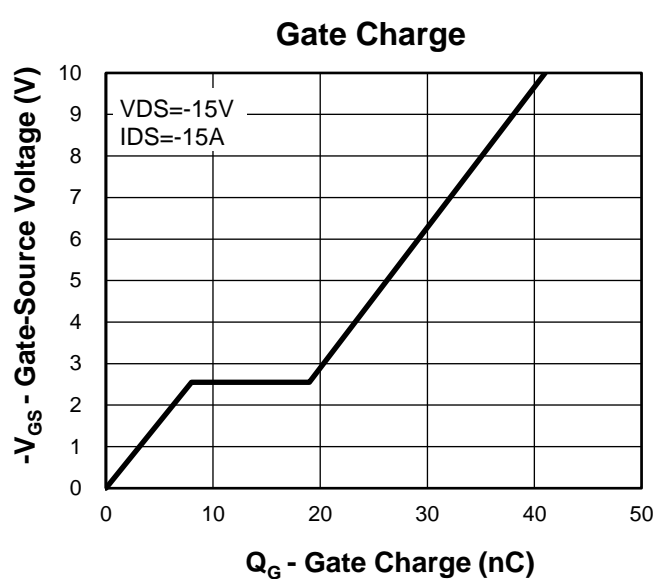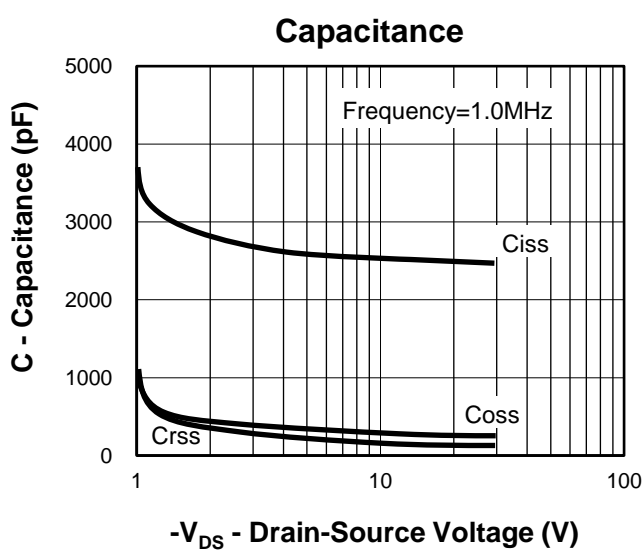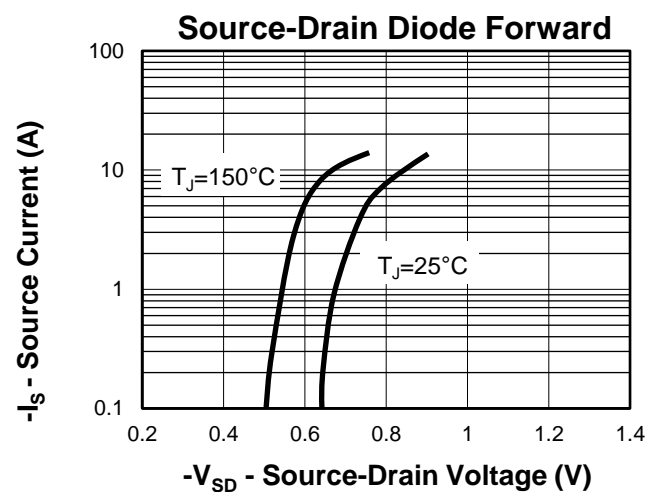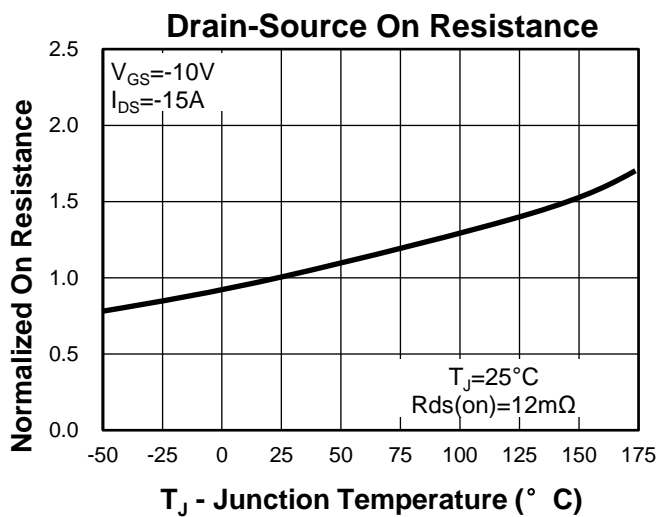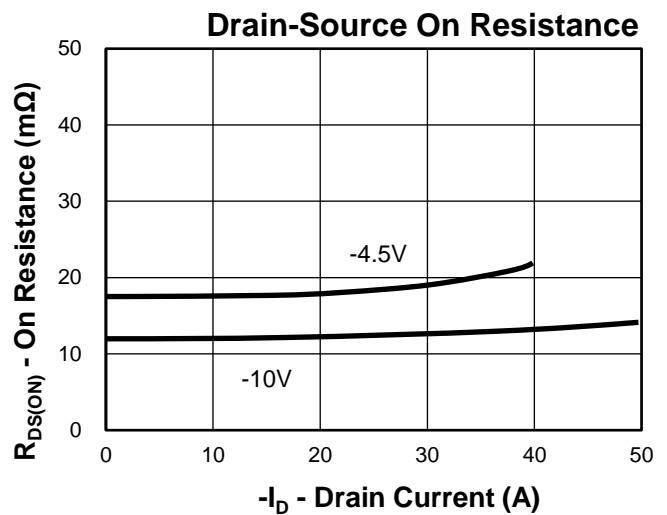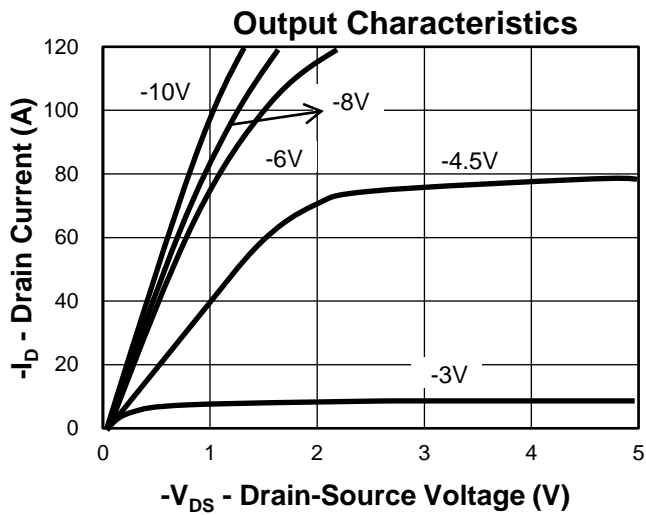


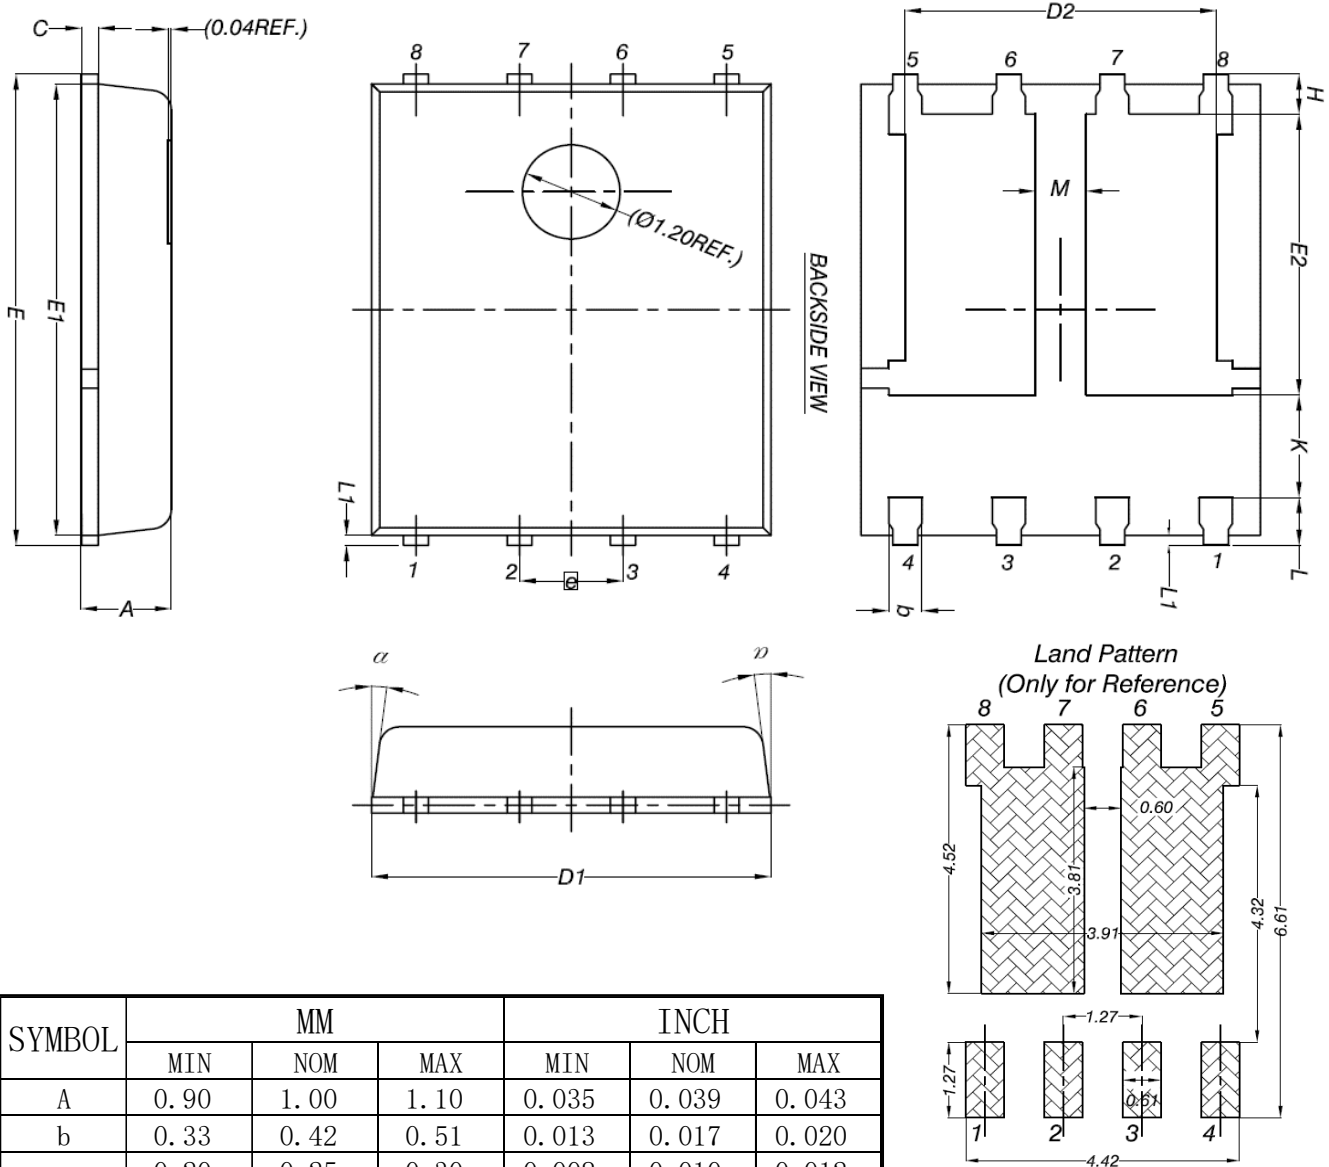


**Package Information**
**PDFN5060 DP1**


SYMBOL	MM			INCH		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.90	1.00	1.10	0.035	0.039	0.043
b	0.33	0.42	0.51	0.013	0.017	0.020
c	0.20	0.25	0.30	0.008	0.010	0.012
D1	4.80	5.05	5.30	0.189	0.199	0.209
D2	3.61	3.79	3.96	0.142	0.149	0.156
E	5.90	6.00	6.10	0.232	0.236	0.240
E1	5.65	5.75	5.85	0.222	0.226	0.230
E2	3.38	3.58	3.78	0.133	0.141	0.149
e	1.27 BSC			0.050 BSC		
H	0.41	0.51	0.61	0.016	0.020	0.024
k	1.10			0.043		
L	0.51	0.61	0.71	0.020	0.024	0.028
L1	0.06	0.13	0.20	0.002	0.005	0.008
M	0.50			0.020		
a	0°		12°	0°		12°


**Avalanche Test Circuit and Waveforms(N-Channel)**

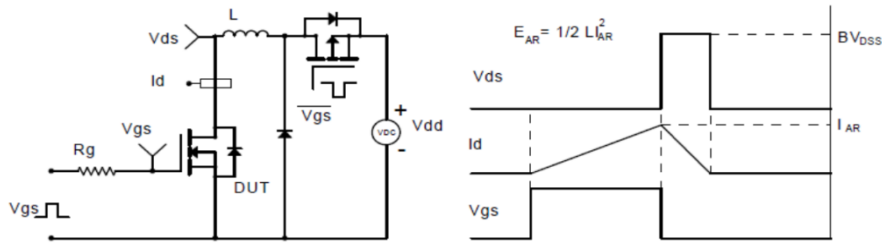


**Switching Time Test Circuit and Waveforms(N-Channel)**




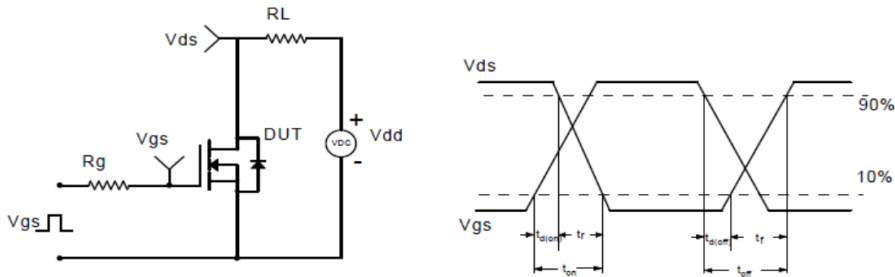


**Diode Recovery Test Circuit and Waveforms(N-Channel)**

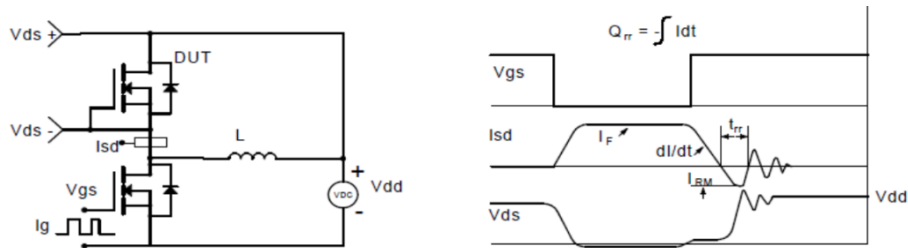

**Gate Charge Test Circuit and Waveform(N-Channel)**

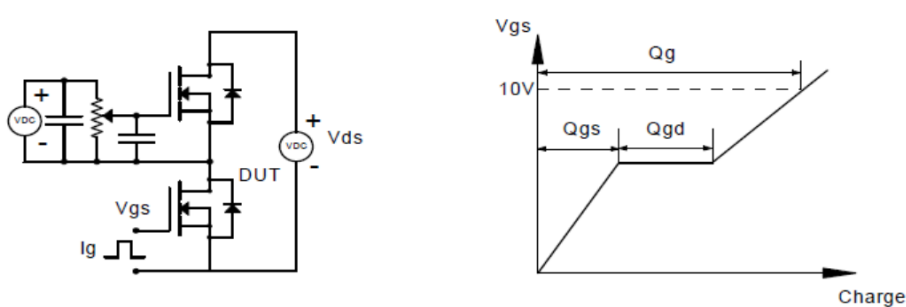

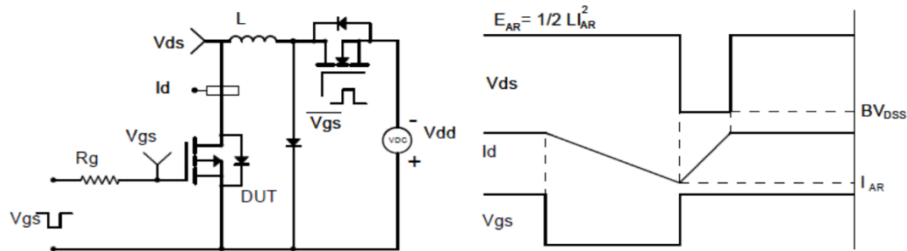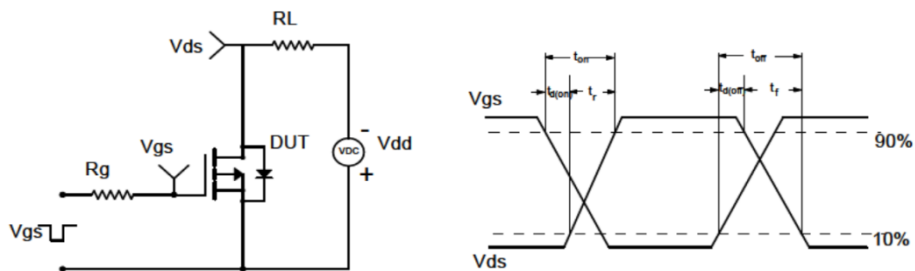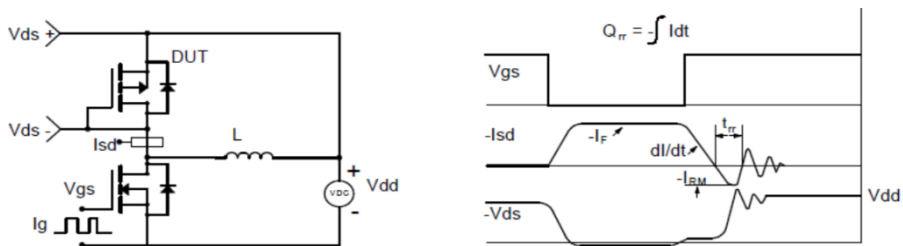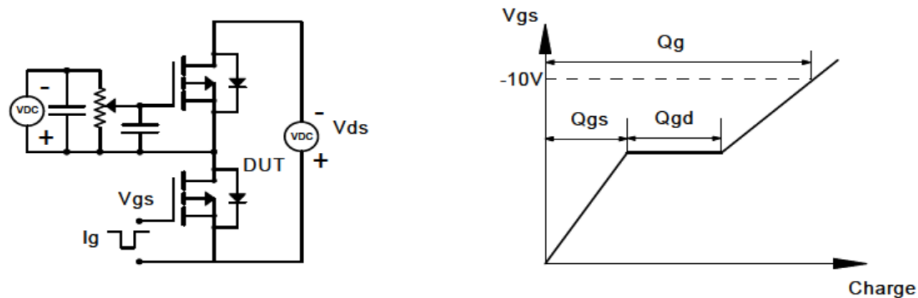**Avalanche Test Circuit and Waveforms(P-Channel)**

**Switching Time Test Circuit and Waveforms(P-Channel)**

**Diode Recovery Test Circuit and Waveforms(P-Channel)**

**Gate Charge Test Circuit and Waveform(P-Channel)**

**Customer Service**

Kwansemi Semiconductor Co.,Ltd

Email:Sales@kwansemi.com

Web:www.kwansemi.com

**DISCLAIMER:**

Kwansemi reserves the right to change the specifications and circuitry without notice at any time. The Products are not designed for use in hostile environments, including, without limitation, aircraft, nuclear power generation, medical appliances, and devices or systems in which malfunction of any Product can reasonably be expected to result in a personal injury. Seller's customers using or selling Seller's products for use in such applications do so at their own risk and agree to fully defend and indemnify Seller.